



Brick Wall Analog Deletion

Eagle Brick Wall Deletion EBWD

The EBWD series of Channel Deletion filters attenuate the entire channel from video to audio while preserving the adjacent channel carriers. This allows the reinsertion of a new channel or data signal without interference from the original signal.

Application

Removal of a selected channel or frequency to allow the reinsertion of a locally originated signal.
Commercial Accounts, Schools, Hospitals, Hotels, Homeowners

Features


- Exceptional Low Insertion Loss
- Extended High Frequency
- Temperature / Frequency Stable
- Passes Adjacent Channels
- Rack Mount or Wall Mount Options
- Connectors "F" Type
- Power Passing Available

Specifications

CHANNELS: 2 through 125
PASSBAND: 5 MHz - 750 MHz (ch 2,3)
5 MHz - 1 GHz (ch 4-125)
* 1 GHz Ext available for channels 2 and 3
CHANNEL REJECTION: -55 dB typ.
ADJACENT CARRIER LOSS: -3.0 dB typ.
INSERTION LOSS: -1 dB typ.
TEMPERATURE RANGE: 32° F to +140° F
IMPEDANCE: 75 Ohms

Ordering Information

EBWD-XX or EBWD-XX-R or -W,
XX=CHANNEL, R=RACK MOUNT, W=WALL MOUNT

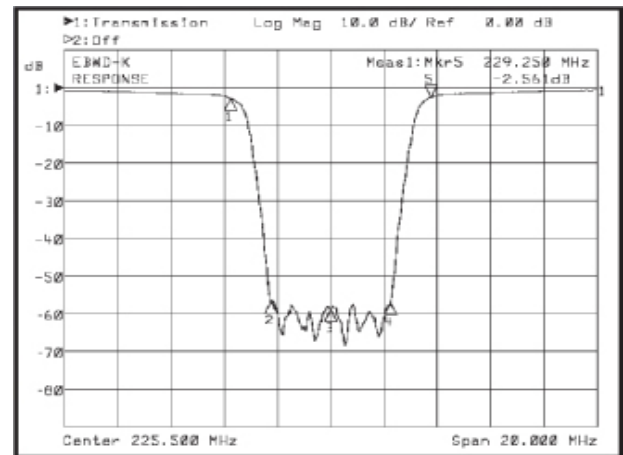

Specifications subject to change without notice.

Multiple Channel
Deletions Available



• EBWD Wall Mount



• EBWD Rack Mount

Eagle Comtronics Inc. is a leading manufacturer of RF products. We offer many products as well as quick response on custom request. For more information email our sales staff :
sales@eaglecomtronics.com or visit our web site: eaglecomtronics.com.

7665 Henry Clay Boulevard
Liverpool, NY 13088

Ph. 1-800-448-7474
Email: sales@eaglecomtronics.com
www.eaglecomtronics.com